


Extraction unit for suction probe incl. suction probe

- Extraction unit for suction probe
- Inclusive suction probe GEO-SO50
- Hose connection DN50
Outside-diameter of nozzle 50mm
- Sliding plate for easy cleaning and maintenance
- Change over unit suitable for delivery hoses DN50
- Discharge flow up to 12 kg/min – depends on the length and laying of hose
- Suitable for operation with wood pellets DIN EN ISO 17225-2 (replacement for EN14961-2 and Ö-Norm M7135)
- Distance boiler – extraction unit up to 12m simple hose length
(Follow manufacturer's instructions – boiler-suction system!)

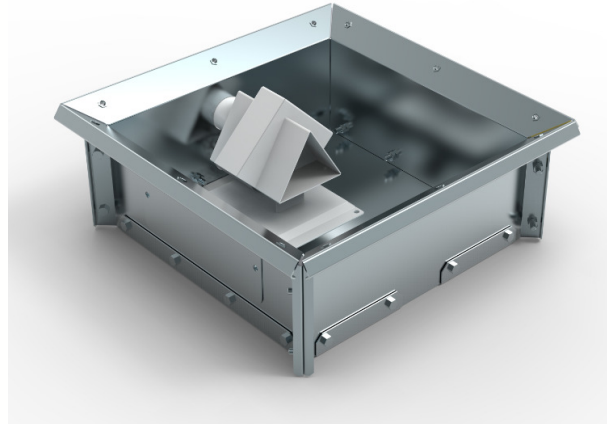

Article number	Description	Dimension of packaging in cm	Weight
1-100.00.142	GEO-ENSO	600x500x200	12,50 kg

Materials used:

Extraction unit made of galvanised steel,
Suction probe steel powder-coated

Sketch:

